


Type BV-shallow steel Type BVE-shallow stainless steel


sealed covers



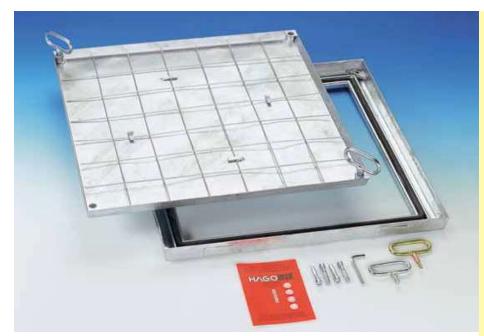

Type BV-shallow the bottom of the cover is reinforced

Type BV-shallow steel/BVE-shallow steel, scale 1 : 5

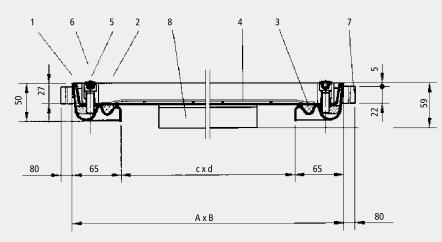

Load capacity: Pedestrian use

Material: BV-shallow-frame and cover in 2 mm cold-formed precision steel profiles. Hotdip galvanised. BVE-shallow-all stainless steel, grade 304, passivated after manufacturing.

Features: Sealed cover with an installation depth of only 5 cm. The shallow frame means it will often fit in a screed - and the cover is lighter to lift. The base plate of the cover is reinforced. Tapered design allows easy opening. Virtually invisible when in place. EPDM seals. Steel mesh reinforcement.

The Lift-Off opening system: Every **HAGODECK Type BV/BVE shallow** cover comes with a set of lifting keys and clear installation instructions.

The **HAGO** advantage: jammed covers are released by simply turning the Golden Key.

Applications: Inside buildings or in their surroundings where water tight covers are required.

Installation: This must be carried out according to our installation instructions. Care must be taken to seal the outer frame into the surrounding flooring.



Specification clause:

See page 30/31

Туре	Clear dimen- sions of shaft (≈ cm)	Outside dimensions (≈ cm)	Weight empty approx.	S/ O*
	c x d	ΑxΒ		
Galvanised steel				
BV-shallow 22	20 x 20	33 x 33	5 kg	S
BV-shallow 33	30 x 30	43 x 43	8 kg	S
BV-shallow 44	40 x 40	53 x 53	12 kg	S
BV-shallow 55	50 x 50	63 x 63	15 kg	S
BV-shallow 64	60 x 40	73 x 53	15 kg	S
BV-shallow 66	60 x 60	73 x 73	19 kg	S
BV-shallow 86	80 x 60	93 x 73	24 kg	S
BV-shallow 88	80 x 80	93 x 93	28 kg	S
BV-shallow 106	100 x 60	103 x 73	27 kg	S
Stainless steel gr				
BVE-shallow 33	30 x 30	43 x 43	8 kg	S
BVE-shallow 44	40 x 40	53 x 53	12 kg	S
BVE-shallow 55	50 x 50	63 x 63	15 kg	S
BVE-shallow 64	60 x 40	73 x 53	15 kg	S
BVE-shallow 66	60 x 60	73 x 73	19 kg	S
BVE-shallow 86	80 x 60	93 x 73	24 kg	S
BVE-shallow 88	80 x 80	93 x 93	28 kg	S
BVE-shallow106	100 x 60	103 x 73	27 kg	S

Cover depth \approx 2,7 cm, Installation height \approx 5,0 cm Special sizes possible

S = available from stock

*O = to order

1 Frame 6 Plastic cap 2 Cover 7 Anchor 3 Seal 8 Reinforcement

4 Reinforcement 5 Allen screw